


# TRINITY CONTAINERS, LLC UNDERGROUND TANKS

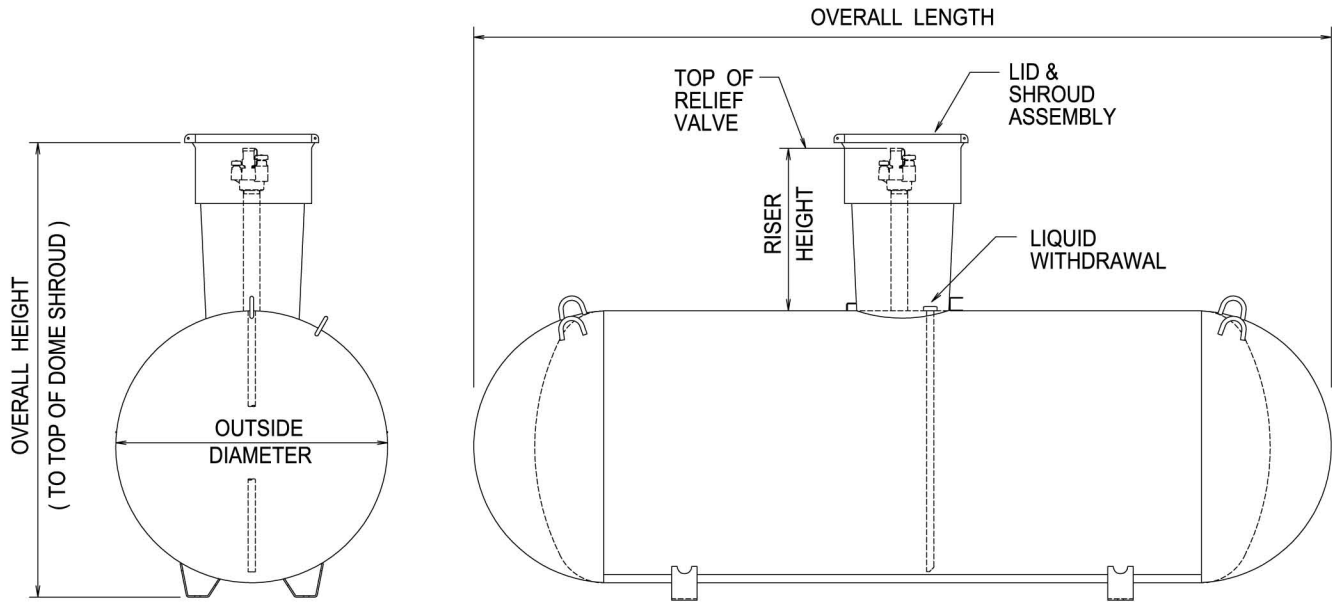

## General Specifications

Conforms to the last edition and addenda of the ASME, Section VIII, Division 1. Complies with NFPA 58. The 28" Riser tank conforms to specifications set forth by the Railroad Commission of Texas.

Rated at 250 psig from -20° F. to 125° F. All tanks may be be evacuated to a full (14.7 psi) vacuum.

Vessel finish: Coated with TGIC red powder.

Applicable federal, state or local regulations may contain specific requirements for protective coatings and cathodic protection. The purchaser and installer are responsible for compliance with such federal, state, or local regulations.

<b>UNDERGROUND VESSEL DIMENSIONAL INFORMATION</b>						
All vessels dimensions are approximate						
WATER CAPACITY	OUTSIDE DIAMETER	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT Riser Height 28"		WEIGHT
120 wg. 454.2 L	24" 609.6 mm	Ellip	5' - 5 7/8" 1673.2 mm		5' - 0 3/8" 1533.5mm	252 lbs. 114.3 kg.
250 wg. 946.3 L	31.5" 800.1 mm	Hemi	7' - 2 1/2" 2197.1 mm		5' - 7 3/8" 1711.3 mm	472 lbs. 214.1 kg.
320 wg. 1211.2 L	31.5" 800.1 mm	Hemi	8' - 11 3/4" 2736.9 mm		5' - 7 3/8" 1711.3 mm	588 lbs. 266.7 kg.
500 wg. 1892.5 L	37.42" 950.5 mm	Hemi	9' - 10" 2997.2 mm		6' - 1 7/8" 1863.7 mm	921 lbs. 417.8 kg
1000 wg. 3785.0 L	40.96" 1040.4 mm	Hemi	15' - 10 7/8" 4848.2 mm		6' - 5 3/8" 1965.3mm	1731 lbs. 785.2 kg
1465 wg. 5545.0 L	46.614" 1184 mm	Ellip	17' - 7 1/4" 5365.8 mm		6' - 11 1/16" 2109.8 mm	2745 lbs. 1245 kg
2000 wg. 7570.0 L	46.614" 1184 mm	Ellip	23' - 9 3/8" 7248.5 mm		6' - 11 5/16" 2065.3 mm	3685 lbs. 1671.4 kg